


T110-M

HIGH SPEED VARIABLE DATE PRINTING SYSTEM

- ◆ PRINTING SPEED UP TO 406M/MIN
- ◆ WIRELESS KEYBOARD AND MOUSE CONTROL
- ◆ ANTI-COUNTERFEITING TRACE DATA PRINTING
- ◆ CALCULATE PRINTING COSTS IN REAL TIME
- ◆ GS1 INTERNATIONAL MEDICINE MONITOR CODE
- ◆ NETWORK REMOTE CENTRALIZED MANAGEMENT

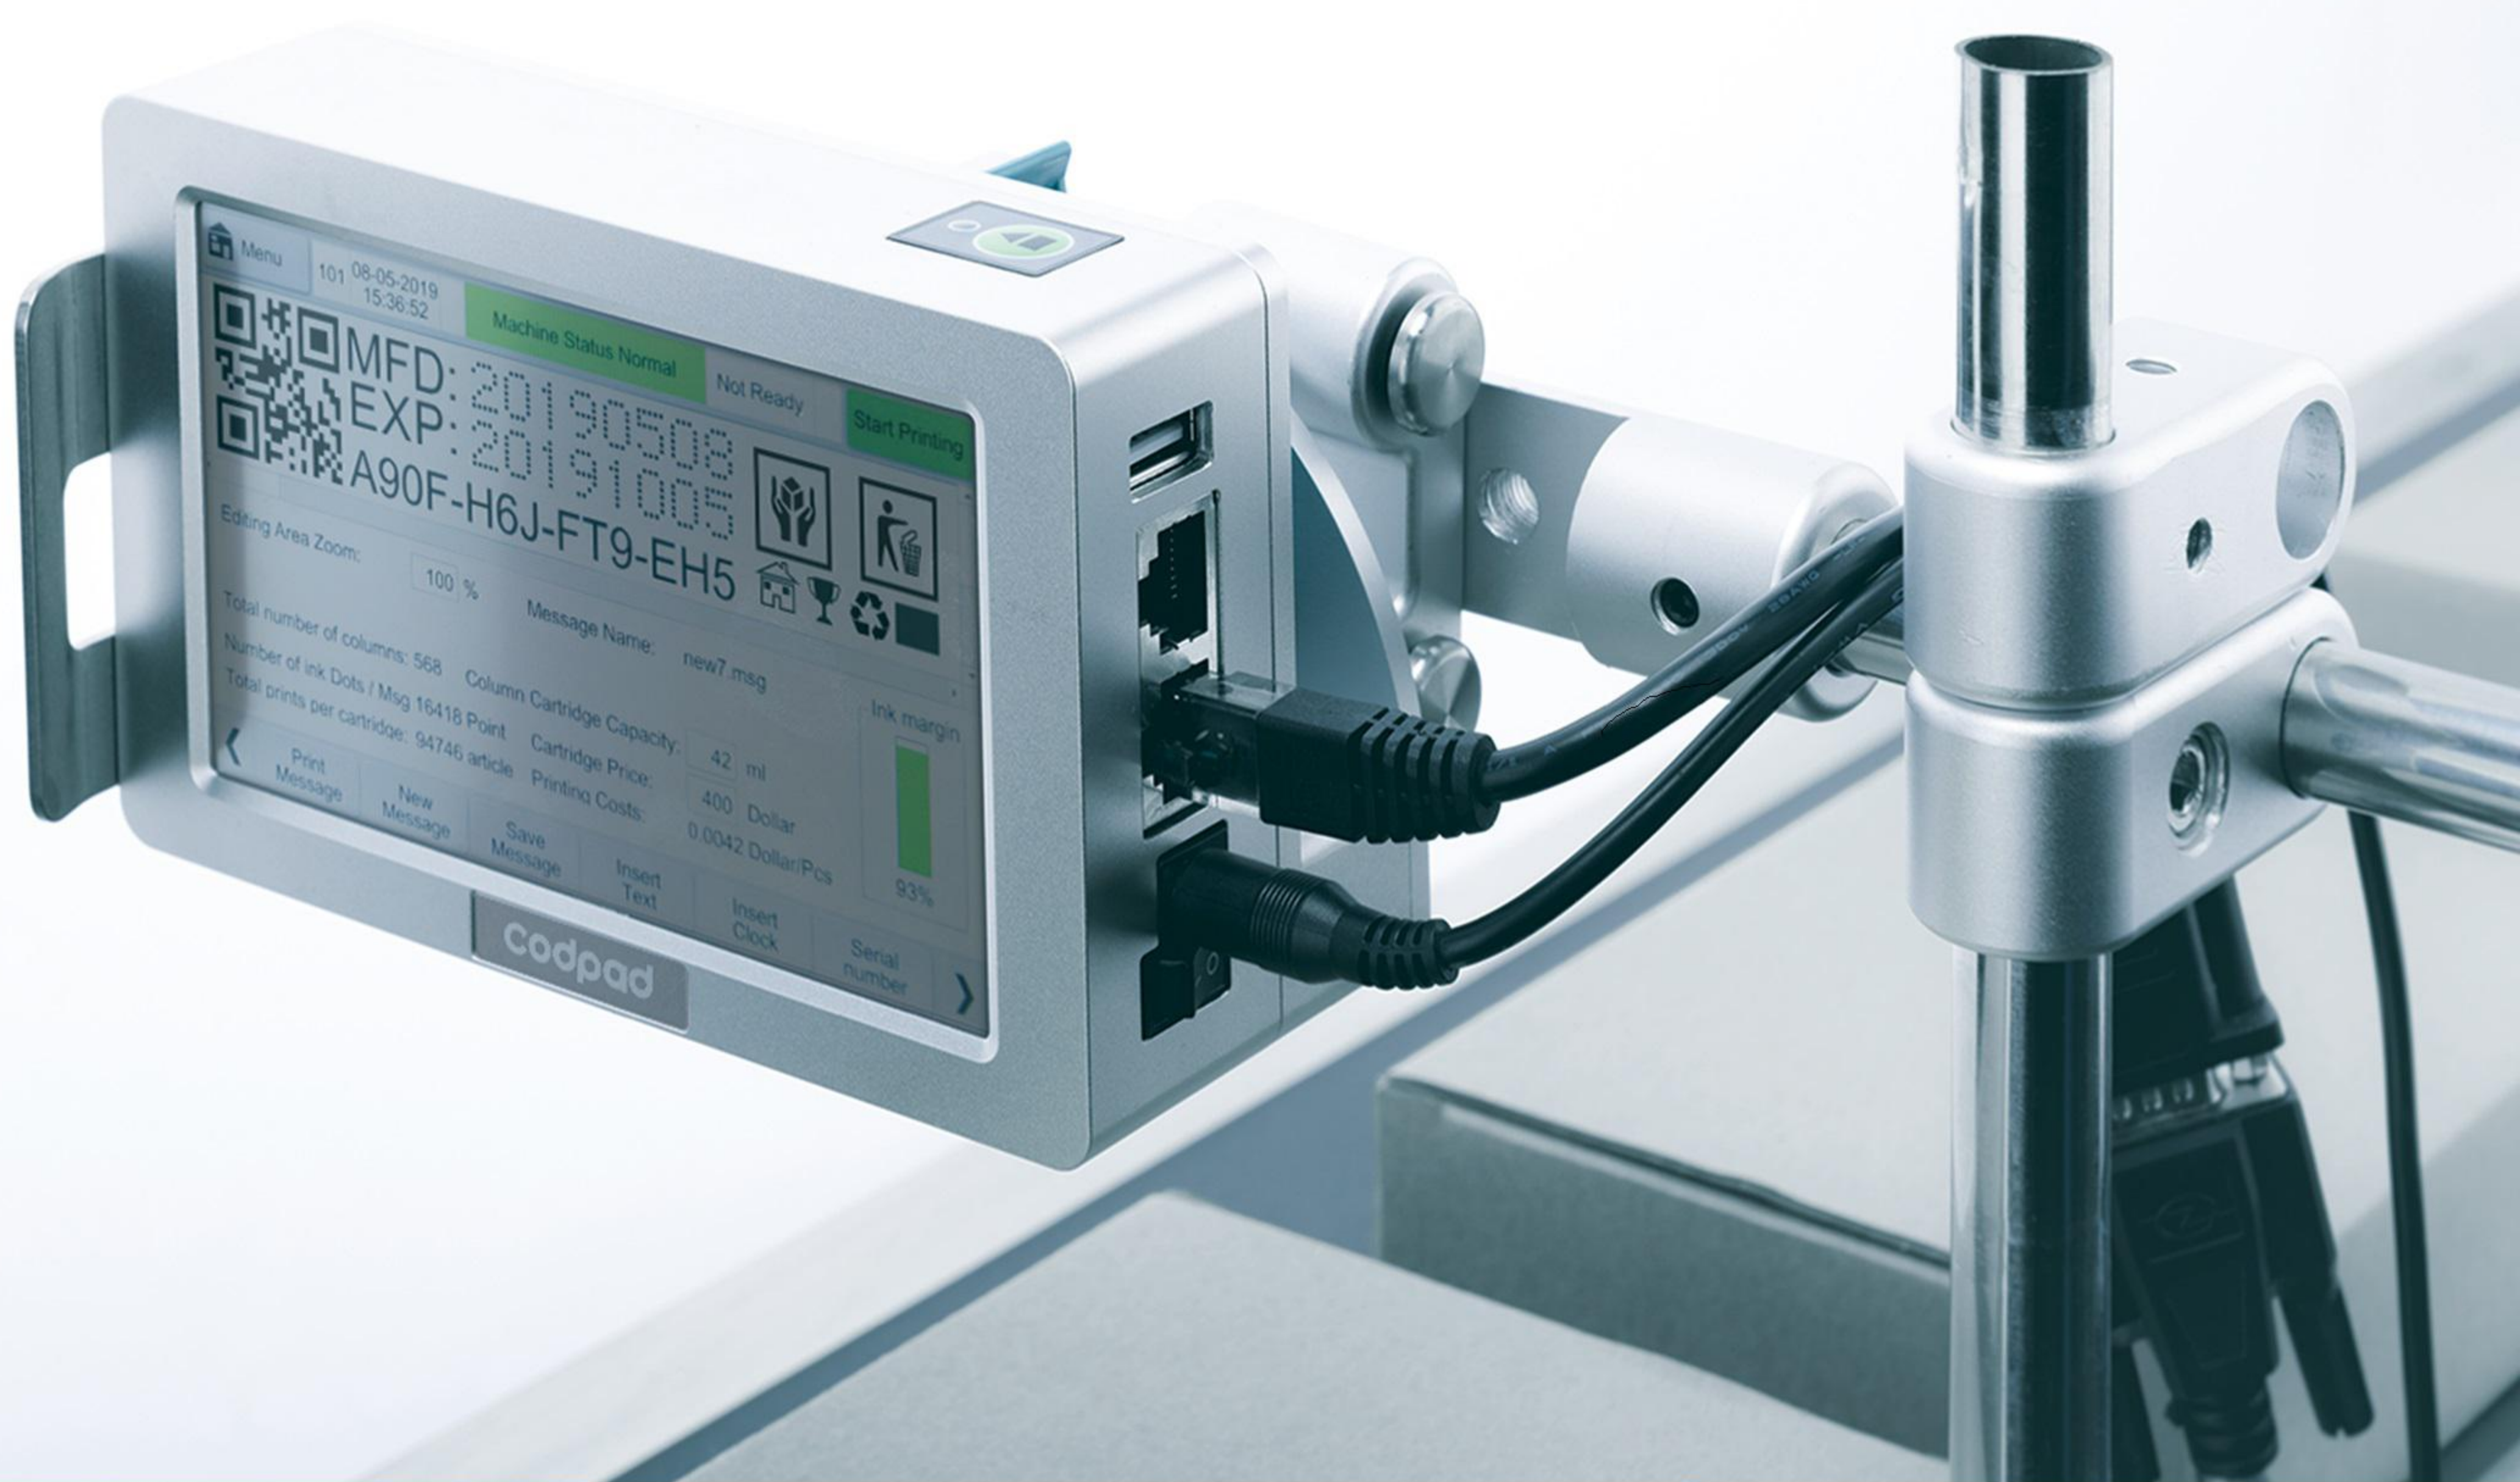

◆ More reliable and professional hardware

Use of the American TI's AM3358 Industrial Grade CPU, Xilinx Spant6 Industrial Grade FPGA. More stable, reliable and anti-interferences in various conditions rendering the printing a unique experience.

The print engine uses TIJ dedicated ASIC chip, a perfect match for a variety of original and licensed HP Inks.

Professional Cartridge preheat algorithm to ensure optimum print quality at high and low temperatures and environments.

◆ More Powerful and Smarter software

Intelligent embedded Linux operating system provides a professional and more user friendly interface.

Embedded powerful drop consumption algorithm that allow instant calculation of cost per print.

Powerful variable functions of the 2D Code to meet the today growing customers' demand.

Efficient and flexible variable database functions to meet various applications requirements for product traceability.

Codpad

DYNAMIC TRACEABILITY DATABASE HIGH SPEED PRINTING SOLUTION

Professional TIJ inkjet printer manufacturer

OEM ODM SDK ONE-STOP SERVICE

- ◆ INDUSTRIAL GRADE 5 INCH TOUCH SCREEN
- ◆ SNAP-ON CARTRIDGE, MORE SIMPLE AND RELIABLE
- ◆ ADJUSTABLE INKJET CONCENTRATION
TO MEET DIFFERENT NEEDS
- ◆ SUPPORT LARGE CAPACITY INK BAGS AND
CONTINUOUS INK SUPPLY SYSTEM
- ◆ MULTIPLE BRACKETS ALONG WITH VARIOUS
INSTALLATION METHODS TO CHOOSE
- ◆ EASILY MATCH THE WEIGHING MACHINE
PACKING AND PAGING MACHINE



Technical Parameters

Machine	Operating System	Embedded Operating System
	Main Hardware	American TI A M3358 industrial grade CPU/USA Xilinx Spant6 industrial grade FPGA / TIJ dedicated ASIC chip
	Communication Interface	Network Interface USB/RJ45 to RS-232
	External Interface	Photocell, Encoder, External Reverse/Inverse control, Alarm outputs, Serial Number external Reset, External data Selection.
	Supported Languages	Italian, English, French, Finnish, Arabic, Danish, German, Russian, Norwegian, Portuguese, Spanish, Japanese.
	Power Supply	100 - 240 Volts AC 50-60Hz input / 12.6Volts 3Amps DC output
	Body Material	Industrial Stainless steel
	Dimension	138mm x 87mm x 60mm/
	Working Environment	Max Temp 55C Degrees / Humidity 30% to 70% RH
Printing Head	Nozzle Type	Thermally Foamable Head TIJ2.5
	Print Accuracy	150DPI / 300DPI / 600DPI
	Print Height	Minimum 1mm / Maximum 12.7mm
	Printing distance	Optimum spray printing distance of 1-2 mm
	Print distance	1mm to 2mm
	Print Contents	Multi language Characters, 2DCode, Barcodes, Images, Serial Numbers, Date, Counters, Variable Database, RS232 to receive real data to print
	Printable Substrates	Cardboard, Plastic, Metal, Cables, Electronic components, Auto Parts, Industrial Chemical packaging, Pharmaceuticals and more.
	Ink Type	Aqueous or Solvent based 42ml Cartridges CIS S
	Ink Color	Black, White, Red, Yellow, Blue, Green, Stealth, UV readable
	Cartridge Chip	Contactless RFID tags for automatic identification and recording ink parameters and consumptions



Packing carton



Medicine




Furniture and wood



Food packaging




PET plastics

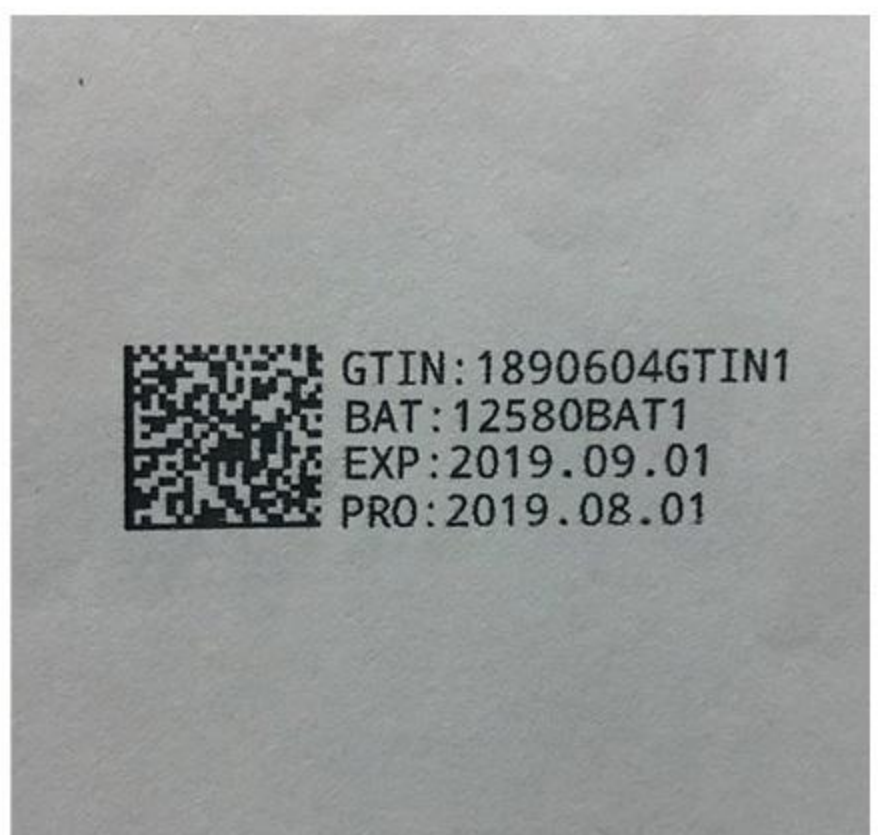

GS1 Data Matrix



Dynamic security barcode

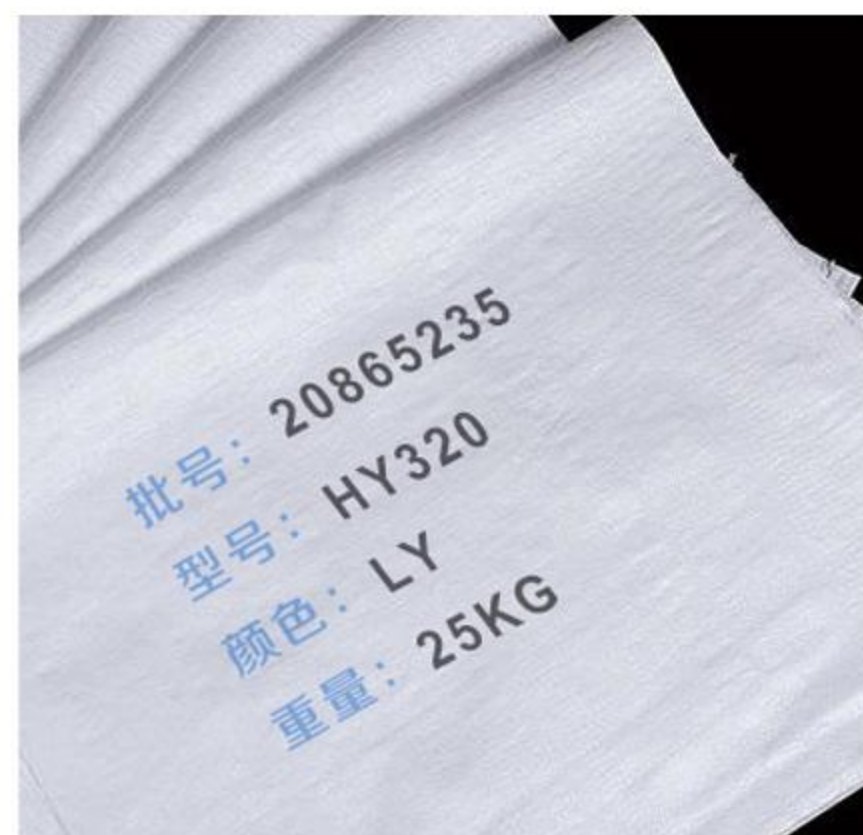

Multi-group printing



HD bold font



Multi-dot font

Codpad

GUANGZHOU CODPAD E-TECH COMPANY LIMITED

TEL: (+86)20-81631033 E-mail: service@docod.com.cn

Fax number: (+86)20-81631033 Web: www.codpad.com

Add: Room 302, Building 3, NO.9, Hejing Road, LiWan District, Guangzhou, China